

TO CLASSIFICATION OF THIS PAGE (When Date Entered)	
(14) REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
REPORT NUMBER  2. GOVT ACCESSION NO.	3 RECIPIENT'S CATALOG NUMBER
WHOI-81-12 AT. A096311	
THE DENTITE DOWNERS AND THE PROPERTY OF THE PENTITE DOWNERS OF THE PENTITE DOWNERS OF THE PENTITE OF THE PENTIT	5. TYPE OF REPORT & PERIOD COVERED
THE BENTHIC BOUNDARY LAYER EXPERIMENT ON THE HATTERAS ABYSSAL PLAIN: CURRENT AND TEMPERATURE	Technical ript.
OBSERVATIONS. T	PERFORMING CROWNEPORT HUMBER
7. AUTHOR(e)	S. TCUNTRACT OR GRANT HUNBER(S)
A./Spencer, E./D'Asaro, L. Armi	OCE 76-81190
Armi	N0Ø014-76-C-Ø197,
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10 PROGRAM ELEMENT, PROJECT, TASK
	AREA & WORK UNIT NUMBERS
Woods Hole Oceanographic Institution Woods Hole, Massachusetts 02543	NR 083-400
11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
NORDA/National Space Technology Laboratory	February-1981
Bay St. Louis, MS 39529	44
14. MONITORING AGENCY NAME & ADDRESS(It different from Controlling Office)	15 SECURITY CLASS. (of this report)
(12) 52	Unclassified
	154. DECLASSIFICATION DOWNGRADING SCHEDULE
6. DISTRIBUTION STATEMENT (of this Report)	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from	n Report)
8 SUPPLEMENTARY NOTES	
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)	<del></del>
<ol> <li>Ocean currents</li> <li>Ocean temperature</li> <li>Benthic boundary layer</li> </ol>	
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)	
The near bottom density and velocity fields a plain were observed with a current/temperature mea yo-yoing profiler. This report describes the arra of calibration and data quality. Sources of direct from vane and compass performance and bearing direct.	suring array and a towed- y data and includes details tion error were diagnosed

DD 1 JAN 73 1473

EDITION OF 1 NOV 68 IS OBSOLETE S/N 0102-014-6601

THE BENTHIC BOUNDARY LAYER EXPERIMENT ON THE HATTERAS ABYSSAL PLAIN: CURRENT AND TEMPERATURE OBSERVATIONS

by

A. Spencer, E. D'Asaro, and L. Armi

WOODS HOLE OCEANOGRAPHIC INSTITUTION Woods Hole, Massachusetts 02543

February 1981

## TECHNICAL REPORT

Prepared for the National Science Foundation under Grant OCE 76-81190 and for the Office of Naval Research under Contract N00014-76-C-0197; NR 083-400.

Reproduction in whole or in part is permitted for any purpose of the United States Government. This report should be cited as: Woods Hole Oceanug. Inst. Tech. Rept. WHOI-81-12.

Approved for public release; distribution unlimited.

Approved for Distribution: Take + C Boardsley, Robert C. Beardsley, Acting Chairman Department of Physical Oceanography

#### Abstract

The near bottom density and velocity fields above the Hatteras abyssal plain were observed with a current/temperature measuring array and a towed-yo-yoing profiler. This report describes the array data and includes details of calibration and data quality. Sources of direction error were diagnosed from vane and compass performance and bearing direction.

# Table of Contents

	Page
Acknowledgments	ii
Preface	iii
Introduction	1
Description of Experiment	2-3
Data Processing	4-6
VACM Calibration and Data Quality	7-11
References	12
Table Captions	13
Tables 1-5	14-21
Figure Captions	22
Figures 1-11	23-42
Appendix	43-44

### Acknowledgments

The authors wish to acknowledge the moored array group, for their work of organizing, deploying and recovering the instruments. Jerry Dean did the fine-tuning of the current meters, and the CTD group assisted with the preparation of the CTDs and the processing of the data. Ellen Levy assisted with the preparation of the figures and the manuscript was typed by Audrey Williams.

The work was supported under a grant from the National Science Foundation, grant number OCE 76-81190 and by the Office of Naval Research, contract number N00014-76-C-0197, NR 083-400.

#### Preface

This volume is the twenty-fifth in a series of Data Reports presenting moored current meter and associated data collected by the WHOI Buoy Group.

Volumes I through XXIV present data obtained during the years 1963-1978, arranged either by year or experiment (see notes).

A data directory and bibliography for the years 1963-1978 has been published, as WHOI Technical Report 79-88.

Volume XXV presents data from the Benthic Boundary Layer Experiment, 1977.

Volume No.	WHOI Ref. No.		Notes Year Experiment
I	65-44	Webster, F. and N. P. Fofonoff	
II	66-60	Webster, F. and N. P. Fofonoff	
III	67-06	Webster, F. and N. P. Fofonoff	
ΙV	70-40	Pollard, R. T.	
V	71-50	Tarbell, S. and F. Webster	
VΙ	74-4	Tarbell, S.	1967 measurements
VII	74-52	Chausse, D. and S. Tarbell	1968 measurements
VIII	75-7	Pollard, R.T. and S. Tarbell	1970 Array Data
ΙX	75-68	Tarbell, S., M. G. Briscoe	1973 IWEX Array
		and D. Chausse	
Χ	76-40	Tarbell, S.	1969a measurements
ΧI	76-41	Tarbell, S.	1969b measurements
XII		Cnausse, D. and S. Tarbell	1973 MODE Array
XIII		Tarbell, S. and A. W. Whitlatch	1970 Measurements
VIX	77-41	Tarbell, S., R. Payne and	1976 mooring 592
		R. Walden	Saint Croix
X.J	11-56	Tarbell, S. and A. W. Whitlatch	1971 measurements
	/8-5	Tarbell, S. and A. Spencer	1971-1975 MODE Site
1108	78-49	Tarbell, S., A. Spencer	1975-1977 POLYMODE
		and R. E. Payne	Array II
XAIII	79-65	Tarbell, S., M. G. Briscoe and R. A. Weller	1978 JASIN
XIX	/9-34	Spencer, A., C. Mills and R. Payne	1974-1975 POLYMODE Array I
XX	79-56	Spencer, A.	1974 Rise Array
1 X X	79-85	Mills, C. and P. Rhines.	1978 W.B.U.C.
IIXX	79 <u>–</u> 87	Tarvell, S. and R. Payne.	1973 measurements
I I I X X		Tarbell, S. and R. Payne.	1978 POLYMODE
		,	Array III
XXIV	30-41	Spencer, A., K. O'Neill	1976 INDEX
		and J. R. Luyten.	

# Benthic Boundary Layer Experiment Introduction

The benthic boundary layer is a region adjacent to the ocean bottom with characteristics distinct from the oceanic interior. Near the bottom it is turbulent, and the resultant mixing is seen as a bottom layer homogeneous in salinity, potential temperature and turbidity. Figure 1 shows a typical CTD profile. This layer is the benthic analog of the atmospheric boundary layer and may be similar to the oceanic surface mixed layer.

In a previous study, Armi and Millard (1976) described boundary layer density profiles taken in the western North Atlantic as part of the Mid-Ocean Dynamics Experiment (MODE). They found that simple mixed layers generally occurred over the Hatteras abyssal plain, while irregular structures, commonly with multiple layers, occurred near rough topography. In a short time series at the edge of the plain they observed a doubling of the mixed layer height in less than a day. The Hatteras abyssal plain was chosen for the location of the intensive benthic boundary layer experiment described here both because of the previously observed simple structures and because the interior flow in this area has been extensively studied (cf. Mode Group, 1978; Briscoe, 1975).

This data report is a companion to the paper of Armi and D'Asaro (1980) and the Ph.D. Thesis of D'Asaro (1980). Armi and D'Asaro (1980) describe the observed variability. A bottom mixed layer is almost always present, but varies in height from 5 to 60 meters, with dominant time scales of several days and longer, and space scales of 10 km and larger. Multiple mixed layers and benthic fronts are seen. D'Asaro (1980) discusses the velocity observations in more detail. High frequency velocity fluctuations appear to be due to bottom generated turbulence. The turbulence, so measured, intermittently fills the entire mixed layer. Near-inertial velocity fluctuations are used to compute the flux of internal wave energy into the mixed layer.

#### Description of the Experiment

This experiment was designed to measure the density and velocity structure in both space and time near the ocean bottom. A 3-month time series, May 18, 1977 to August 18, 1977, of velocity and temperature was measured by two bottom moorings (Figure 2) deployed near 28°30'N, 70°30'W by the Moored Array Project of the Woods Hole Oceanographic Institution (WHOI). The Hatteras abyssal plain is extremely flat with a slope of only 20 cm/km over hundreds of kilometers (Bush, 1976). Mooring A (WHOI 621) contained vector-averaging current meters spaced so as to span the mixed layers seen by Armi and Millard (1976). Note that instruments 1 and 2 are separated by 20 m, while the other instruments are separated by 10 m. Each instrument recorded vector average velocity and average temperature every 7 1/2 minutes. In addition, the bottom six instruments measured the average differential temperature between the top and the bottom of the instrument case (1.74 m), as described by Dean (1979). Mooring B (WHOI 622), 4.3 km to the east, contained a single vector-averaging current meter measuring average velocity and temperature every 7 1/2 minutes. A summary of moorings is provided in Table 1.

Three spatial surveys of the boundary layer were made, using a towed CTD package. The first was made on cruise KNORR 66 and the second two on cruise OCFANUS 31. Moorings A and B and a third bottom-moored beacon, C, formed an acoustic navigation net (Phillips et al., 1979). By using acoustic navigation the ship and an instrument package could be located to within 10 m with respect to the moorings. Loran C was also used and provided navigational data outside the acoustic range.

A photograph of the instrument package and a preliminary description of these experimental results can be found in the paper by Armi (1978).

A Neil Brown conductivity, temperature and depth profiler (CTD); a nephelometer built at the Woods Hole Oceanographic Institution; a General Oceanics rosette water sampler; an acoustic transponder (AMF acoustic release); and a Benthos pinger were enclosed in a protective frame which was lowered

from the ship. The bottom pinger and a precision depth recorder were used to bring the instruments to within 2 m of the bottom. Actual bottom pressure was determined by occasionally setting the instrument package gently on the bottom. The bottom pressure was always 5555 dbar. The CTD and nephelometer data were available in real time on the ship.

#### Data Processing

#### Current Meters

The data from the instrument tapes were transcribed to 9-track magnetic tapes, converted to scientific units, edited to remove launch and retrieval transients and bad points, and linearly interpolated across missing or erroneous data cycles. See the section on VACM calibration for details of further modification of temperature data.

WHOI data are identified by a mooring number and a sequential instrument number (e.g. 6223 is the third instrument down on mooring 622). A letter indicating an edited version, and a number indicating the sampling or averaging interval are appended (e.g. 6223A450 is an edited data series with a data point every 450 seconds).

Low passed versions of data series were formed for use in the stick plots and progressive vector plots. The data were passed through a Gaussian filter with a 24 hour halfwidth, and then subsampled once per day. Such data have IDG24 appended to the data name.

#### Vector Stick Plots

The 24-hour averaged current components are plotted as individual vectors along a time scale. The vector orientation is such that east is upwards on the page in Figure 3. (North is upwards in Figures 6 and 7.) Spectra

The horizontal kinetic energy (HKE) and temperature are displayed as spectra in Figure 4. Spectra for all 7 instruments on mooring A are shown. The spectral line for the thermistor on instrument 7 is not shown below 1 cph as it was an internal thermistor, unlike the other six. The HKE spectrum is half of the sum of the spectra of the east and north components. It has the advantage of not being tied to a particular coordinate system.

The spectra are all one-sided, i.e., the area under the spectrum is equal to the variance of the original record. The plots are all log-log hence are not 'variance preserving' i.e., the contributions of various frequency bands to the total variance are not in proportion to the displayed areas.

TIMSAN, the WHOI program (Hunt, 1977) used to produce the spectra breaks the data series into 50% overlapped pieces, computes the Hanned periodogram of each piece, and averages these. The plotted spectra are the average of 38 pieces with 600 points per piece. The spectra are additionally averaged in increasing groups at the higher frequencies to prevent having to plot thousands of points; this gives few degrees of freedom (d.o.f.) at the lowest frequencies, many at the highest frequencies. The 95% confidence limits are shown on one of the plots. Statistics

Statistics for variables measured by the current meters are presented in Table 2. The temperature values for mooring 621 reflect the offsets from Table 3; the values for mooring 622 do not. Mean, standard error, variance, kurtosis, skewness and extrema are given for all the variables, east and north covariance, correlation and other statistics are given for the vectors. For reference, note that a Gaussian random variable would have a kurtosis of 3 and a skewness of zero.

See volume XVII (POLYMODE Array II) of this series for a more detailed discussion of these parameters.

## Progressive Vector Plots

Based on a daily averaged time series, the current vectors are placed tail-to-head so as to show the path that a perfect particle in a perfectly homogeneous fluid would have traveled. Flow regimes and low frequency behavior show up well on this type of plot. The plot in Figure 5 begins with an asterisk, every other day boundary is marked with a tick and every fourth day is annotated.

#### Composite Plots

Composite plots of velocity and potential temperature data from mooring A (mooring 621) are shown in Figure 6a-e. Panels 1 and 2 (top two panels) show north and east velocity components, vector averaged and recorded every 7 1/2 minutes. The zero for each instrument is offset as indicated. Rotor stalls are shown as horizontal lines at zero velocity. Panel 3 shows 1-day mean vector velocities from each instrument plotted daily. The origin of the vector gives central time and height off bottom. Data at 75 m are interpolated from adjacent instruments. Panel 4 shows differential temperature (difference in temperature between the top and

the bottom of the 1.74-m instrument case) for instruments 2-7. Flat traces correspond to no differential temperature (i.e., the instrument is in a mixed layer). The plot for each instrument is offset vertically, corresponding to its height off bottom as indicated on the left-hand scale. Panel 5 shows 5 m°C time/height isotherms of potential temperature linearly interpolated for each data cycle. No isotherms are plotted below the bottom instrument (15 m off bottom). The peculiar step structure on May 22, for example, results from linear interpolation. Panel 6 shows potential temperature/time plots for all seven instruments. Since potential temperature increases upward, the top trace corresponds to the top instrument, and the bottom trace to the bottom instrument. Mixed layers are shown by merging of adjacent potential temperature lines. Times and duration of CTD stations are shown above the bottom time axis.

A similar composite is shown for mooring B (mooring 622) in Figure 7a-e. Panels for differential temperature and height isotherms do not apply to this single instrument.

#### VACM Calibration and Data Quality

#### Temperature

The measured VACM temperature variations have a precision of better than a millidegree (± 1 m°C). The absolute temperature calibrations, however, have an accuracy of about 5-10 millidegrees (Payne, et al., 1976). The VACM temperatures have been calibrated in situ as follows: CTD measurements of the bottom mixed layer reveal it to be almost always homogeneous in potential temperature to within a millidegree. Whenever a given instrument showed a constant differential temperature it was assume: to be in a mixed layer. Whenever two adjacent instruments were in a mixed layer they were assumed to be measuring the same potential temperature. Over a period of 3-4 years VACM 5 has had a low temperature calibration drift of 1 m°C/yr (R. Payne, personal communication); the temperature measured by VACM 5 was used as a reference. For example, on 30 July instruments 5, 6 and 7 were in a mixed layer; thus the temperatures of 7 and 6 were shifted until they agreed with 5. In addition, instrument pairs that showed temperature inversions greater than .5 m°C for longer than 40 minutes were shifted to remove the inversion. There were sufficient mixed layers, some detached from the bottom, to provide a consistent potential temperature calibration for all the VACMs on mooring 621. For the deeper instruments enough mixed layers were present to determine both an offset and a linear drift. The offsets used at the beginning and the end of the experiment are shown in Table 3.

Several CTD stations were made within 50 meters of mooring 621; these stations were used to fix the VACM temperatures with respect to the CTD potential temperatures. For the upper instruments, the CTD stations were also used in the relative temperature calibration. The final VACM potential temperatures are 1 m°C colder than the CTD potential temperatures for the first CTD survey, and 1 m°C warmer for the second and third. The potential temperature from the 7 VACMs of mooring 621 and the 2 CTDs should be consistent with each other to within 2 m°C.

## Velocity

The VACM measures current speed with a Savonius rotor. After recovery of the instruments on mooring 621, they were individually calibrated in the W.H.O.I. flume as described in Appendix A. The new values of a=39.44, b=1.3 were used to decode the velocities for all of the instruments.

The VACM measures current direction with a nearly neutrally buoyant vane. Vane angle, the orientation of this vane relative to the instrument case and compass angle, the orientation of the instrument case relative to north are each digitized to the nearest 2.8° and summed to form the instantaneous current direction, bearing angle. Every 450 seconds the vector average north and east components of velocity, and the latest values of vane angle and compass angle, are recorded.

All 8 VACM instruments used in this experiment performed well, giving complete records of velocity and temperature, with no obvious recording errors. Some measured direction errors and resultant velocity errors were discovered and are discussed below.

#### Direction error

The third panel of figure 6 shows 1-day mean velocity vector for each instrument as a function of time. A persistent shear is seen between the instruments at 45 and 55 m from early June to mid-July. Figure 8 displays the same data with the mean velocity, obtained by averaging all the instruments at each time, subtracted and the coordinate system rotated so that the mean velocity is horizontal pointing right. The velocities measured at 45 m and 85 m are seen to have a persistent bias to the right of the mean; those at 55 m and 65 m are biased to the left of the mean. The observed biases are equivalent to roughly 10° differences in the measured current direction between instruments. The pattern persists for roughly 40 days, with no corresponding feature in the observed temperatures (bottom panel of figure 6); the pattern then abruptly disappears on July 20.

Figure 9 plots the orientation of mooring 621 in mid-July, as measured by the compasses in each of the top 4 instruments. The mooring is relatively steady except for two rapid rotations occurring at about 0000 and 2000 on July 19, the same day that the persistent shears described above disappear. This is strong evidence that these shears are due to an error in the VACM measurement of current direction.

The vane and compass angle records are examined below. None of the errors found appear sufficient to explain the observed error in direction. The measured VACM directions must therefore be assumed to have systematic and time variable direction errors of unknown origin and magnitude up to 5°. These errors may also be present in other VACM data.

#### Vane performance

Vane performance was good, except for instrument 6213 in which a slight stickiness developed in the vane. This stickiness can be seen in several diagnostic tests.

Figure 10 shows the vane angle as a function of time for all instruments at the start, May 18, and end, August 18, of the experiment.

Instrument o.13 looks similar to the other vanes at the start of the experiment, but by the end of the experiment shows much less variation, presumably due to a slight mechanical binding in the vane bearings. The vane record for instrument 6213 tends to remain fixed for several data cycles. A useful measure of this tendency is stickiness S defined by

S = number of samples with no change
 from previous sample in a given
 interval for instrument i

In this experiment in which several instruments are moored nearby, a more useful related statistic is the relative stickiness  $R_{\rm s}$ 

$$R_{i} = \frac{S_{i} - \overline{S}}{\overline{S}}$$

where  $\overline{S}$  is the average of  $S_i$  over all the instruments. If  $R_i > 0$  the  $i^{th}$  instrument is stickier than the average; if  $R_i < 0$  it is less sticky. Table 4 gives  $R_i$  averaged over 10 day intervals for each instrument. Instrument 6213 stands out as abnormally sticky starting in mid-June.

#### Compass performance

The compasses in this experiment generally performed well. Laboratory tests, however indicated that the compass on instrument 6214 was somewhat sticky. One of the standard precruise VACM compass checkout tests is to deflect the compass needle with a small magnet, remove the magnet and then allow the compass to come to rest. This test is repeated and the variability of the final compass position is observed. If this variability is large the compass bearings may be abnormally sticky.

Table 5 tabulates the results of this test for each of the mooring 621 instruments, through several checkout tests. For each set of tests the number of times the compass stopped 0, 1, 2, 3, 4 and 5 bits away from the mean position is tabulated. Generally the compass stops within 1 bit of the mean. Some instruments, for example, 6212 have compasses which return repeatedly to the same position within one bit. Instrument 6214, however, shows deviations up to 5 bits in a pre-cruise test, and up to 2 bits in post-cruise tests. It is tempting to attribute the direction difference found in instrument 6214 to this sticky compass. However instrument 6211, which gives a similar direction to 6214, has one of the least sticky compasses according to the laboratory tests. Compass stickiness, as well as it can be measured, does not appear to account for the observed direction error.

#### Bearing-Direction

A useful diagnostic time series is the difference between bearing, the instantaneous current direction recorded every 450 seconds, and direction, the vector mean current direction averaged over 450 seconds. Bearing-direction is plotted in Figure 11 for 3 selected intervals, along with the speed from instrument 6211.

At the start of the record, Figure 11a, bearing-direction shows a fairly uniform jitter of about 1.5°, which is quite small for the difference of two time series digitized to 2.8°. Bearing and direction are seen to agree well. At the end of the record, Figure 11c, bearing-direction for instrument 6213 shows a much larger deviation, and a lack of high frequencies. This can be attributed to the sticky vane in 6213, which, although its effect may be partially averaged out in east and north, shows up strongly here in the difference between the averaged and unaveraged current orientation.

Figure 11b shows bearing-direction during a period of high speed. The variance of the time series is seen to increase when the current speed is greater than 13 cm/s. This suggests that additional noise is being introduced into the vane motion, at these speeds, possibly due to mooring motion. Ruddick (1977) finds a similar behavior.

The end of Figure 11a and the beginning of Figure 11c are periods of low speed. Bearing-direction is seen to be highly variable during this time. This may be due either to poor vane response at low speed or a large high frequency variance in actual current direction in the absence of mean currents. Note that when the rotor is stalled, direction is not defined and bearing-direction is plotted as zero.

Bearing-direction for instrument 6215 shows a large spike on August 17. This is due to a wild value of vane at this time.

#### References

- Armi, L., 1978

  Mixing in the deep ocean The importance of boundaries. Oceanus, 21 (1), 14-19.
- Armi, L. and E. D'Asaro, 1980

  Flow structures of the benthic ocean. <u>Journal of Geophysical</u>
  Research, 85 (Cl), 469-484.
- Armi, L. and R. C. Millard, 1976

  The bottom boundary layer of the deep ocean. Journal of Geophysical Research, 81 (27), 4983-4990.
- Briscoe, M. G., 1975

  Preliminary results from the Tri-moored Internal Wave Experiment (IWEX). Journal of Geophysical Research, 80 (27), 3872-3884.
- Bush, P. A., 1976

  Bathymetry of the Mode-1 region. Deep-Sea Research, 23 (12), 1105-1113.
- D'Asaro, E., 1980
  Structure and dynamics of the benthic boundary layer above the Hatteras abyssal plain. Ph.D. Thesis, Massachusetts Institute of Technology and Woods Hole Oceanographic Institution Joint Program.
- Dean, J. P., 1979

  A moored instrument for vertical temperature gradients. <u>Journal</u> of Geophysical Research, 84, 5089-5091.
- Hunt, M., 1977

  A program for spectral analysis of time series. Woods Hole
  Oceanographic Institution Technical Report WHOI Ref. 2-77.
- Mode Group, 1978

  The Mid-Ocean Dynamics Experiment. Deep-Sea Research, 25 (10), 859-910.
- Payne, R. E., A. L. Bradshaw, J. P. Dean and K. E. Schleicher, 1976 Accuracy of temperature measurements with the VACM. Woods Hole Oceanographic Institution Technical Report WHOI Ref. 76-94.
- Phillips, J. D., A. H. Driscoll, K. R. Peal, W. M. Marquet and D. M. Owen, 1979 A new undersea geological survey tool: Angus. Deep-Sea Research, 26, 211-225.
- Ruddick, B., 1977
  Observations of interaction between the internal wavefield and low frequency flows in the North Atlantic. Ph.D. Thesis,
  Massachusetts Institute of Technology and Woods Hole Oceanographic Institution Joint Program.

# Table Captions

Table	1	Summary of mooring information
Table	2	Statistics on current meter data
Table	3	Table of offsets applied to temperature data from instruments
		on mooring A
Table	4	Vane stickiness values
Table	5	Summary of compass-variability test

Table 1

Mooring Locations and Durations

Mooring #	621	622	
Date Set (1977) (Cruise KNORR 66)	17 May	18 May	
Date Retrieved (1977) (Cruise OCEANUS 31)	18 Aug	18 Aug	
Location deg. min N	28 31.0	28 31.0	
deg. min W	70 28.5	70 24.8	
Bottom Depth (m)	5453	5453	
Float Depth (m)	5328	5403	

# Moored Instrument Data Summary

(93 days of data, from May 18-Aug 18 1977)

Record #	Depth (m)	Height above bottom (m)
6211	5368	85
6212	5388	65
6213	5398	55
6214	5408	45
6215	5418	35
6216	5428	25
6217	5438	15
6221	5418	35

Table 2a

```
***** *** *** *** ** ** ** ** ** *
** 62118450
             ** 17761 POINTS FROM 77- V -18 TC 77-VIII-18
INST. V-0325 DEPTH 5368 M. UNITS = MM/S , DEGREES CELSIUS
VARIABLE ---- EAST ---- NORTH ---- SPEED ---- TEMPERATURE
             42.798
        =
MEAN
                        -2.300
                                     73.087
                                                   2.184
STD.ERK.
              -400
                           306
                                       . 238
                                                   • 148<sup>-</sup> − 3
VARIANCE =
            2842.000
                                    1005.382
                        1668.140
                                                   • 383: - 3
                          2.428
        =
KURTOSIS
               2.586
                                      2.607
                                                  6.810
                                       .4)7
                                                   .852
SKEWNESS
        =
               -.186
                          --400F-2
MINIMUM
           -116.287
                        ~110.424
                                     20.000
                                                   2.138
MAXIMUM
        =
                                    177.602
           167.435
                        124.595
                                                  2.373
----EAST & NURTH----- * * * * * * * * * * * *
COVARIANCE =
               64.606
                      ٨.
CGRR. COFF. =
                .2975-1*
ORIENTATION =
               86.859
XALAM
               53.344
MINAX
           =
               40.799
ELLTP
                .235
******************
```

```
INST. DT-5104 DEPTH 5388 M. UNITS = MM/S . DEGREES CELSIUS
VARIABLE ---- EAST ----- NORTH ---- SPEED ---- TEMPERATURE
MEAN
                         3.758
             42.491
                                    73.039
                                                2.171
       =
                                     .249
STD.ERR.
             .398
                         . 319
                                                • 149! - 3
                      1803.403
                                  1097.477
VARIANCE
       =
           2809.184
                                                 · 3971 - 3
KURTOSIS =
             2.591
                         2.351
                                    2.604
                                                2.333
SKEWNESS .=
              -.137
                         -.157
                                     .451
                                                .8778-1
MINIMUM = -108.405
                      -111.090
                                   20.000
                                                2.126
MAXIMUM =
           171.272
                       116.111
                                  176.827
                                                2.231
----EAST & NORTH-----
COVARIANCE =
              307.277
CORR. COFF. =
              .137
ORIENTATION =
              74.287
MAJAX
              53.811
MINAX
              41.436
ELLIP
          =
               .230
```

```
*************
            ** 17761 POINTS FROM 7/- V -18 TC 77-VIII-13
INST. DI-5117 DEPIH 5398 M. UNITS = MM/S . . DEGREES CLESIUS
VARIABLE ---- EAST ----- NORTH ---- SPEED ---- TEMPERATURE
        =
                                  12.238
MEAN
            41.464
                        3.193
STD.FRP.
                                               .155 - 3
                         . 318
                                    • 233
              . 387
                      1791.616
                                  968.038
VAFIANCE
        =
           2665.302
                                               .426 -3
KURTOSIS
        Ξ
             2.729
                        2.390
                                   2.732
                                              2.12)
SKEWNESS
        =
             -.322
                        -.158
                                    .401
                                              -. 1337 -1
MINIMUM
        =
           -114.371
                      -108.820
                                  20.000
                                              2.114
        =
                      119.535
                                  176.814
MAXIMUM
           168.671
                                              2.223
---- FAST & NORTH-----
                      COVARIANCE =
             266.713
CORR. CCEF. =
               .122
ORIENTATION =
              74.297
XALAM
          =
              52.346
MINAX
              41.432
          =
FLLIP
          =
               . 209
**************************
```

```
** 17761 POINTS FROM 77- V -18 TC 77-VIII-1a
** 6214845C
INST. DI-5116 DEPTH 5408 M. UNITS = MM/S . DEGREES CELSIUS
VARIABLE ---- EAST ---- NORTH ---- SPEED ---- TEMPERATURE
MEAN
                        -2.406
                                    73.656
             43.690
                          .335
              .405
STD.FRR.
        =
                                     .244
                                                 ·165 -3
                                                 .484: -3
        =
                      1654.458
                                  1057.607
VARIANCE
           2913.752
                                                1.951
KURTOSIS
        =
              2.571
                         2.338
                                    2.623
                                     .376
                                                .493; -1
SKEWNESS
        =
             -.232
                         -.692t-1
MINIMUM
           -109.407
                      -103.708
                                   20.000
                                                2.11)
MUMIXAM
                       114.886
                                   177.334
                                                2.219
           174.106
                      ----EAST & NORTH-----
CUVARIANCE =
              134.279
CORR. COEF. =
               .612E-1*
DRIENTATION =
              83.931
XALAP
              54.110
                      *
MINAX
          =
              40.501
FLITP
                .252
*************
```

Table 2c

```
**********************
INST. DT-5114 DEPTH 5418 M. UNITS = MM/S . DEGFEES CFESIUS
VARIABLE ---- EAST ----- NORTH ---- SPEED ---- TEMPERATURE
                                   75.953
MEAN
        =
            43.981
                        2.176
                                              2.145
                                    .247
                                               •17)°-3
STD.ERR.
              .415
                         .324
                      1859.560
VARIANCE
           3051.954
                                 1081.718
                                               .513 -3
KURTOSIS =
                                   2.535
                                              1.955
             2.577
                        2.186
SKEWNESS
                        -.159
                                    .283
                                               .392
             -.306
                      -103.736
                                  20.000
MINIMUM
          -111.376
                                              2.105
        =
                      106.814
                                 178.058
                                              2.201
MAXIMUM
           165.511
----EAST & NORTH-----
                      * * * * *
COVARIANCE =
             274.797
CORR. COEF. =
                .115
DRIENTATION =
              71.627
XALAM
          =
              55.787
                      *
MINAX
              42.416
FLLIP
                .240
```

```
*******************
             ** 17761 POINTS FROM 77- V -18 TC 77-VIII-18
** 6216845C
INST. DT-5109 DEPTH 5428 M. UNITS = MM/S , DEGREES CELSIUS
VARIABLE ---- EAST ----- NORTH ---- SPEED ---- TEMPERATURE
                            .6105-1
                                      71.674
                                                    2.133
MEAN
              41.357
                                        .237
                                                    . 1495 - 3
STD.ERR.
               .397
                            . 302
                        1620.480
                                     996.309
                                                    · 393t - 3
VARIANCE
         =
            2832.610
KURTOSIS
               2.628
                           2.292
                                       2.526
                                                    2.756
                                                    .893
SKEWNESS
               -.278
                           -.191
                                        .292
                                                    2.104
MINIMUM
         =
            -112.688
                        -101.498
                                      20.000
                          99.584
                                     170.396
MAXIMUM
             151.847
                                                    2.183
----FAST & NURTH-----
                          * * * * *
COVARIANCE =
               142.233
                        *
                 .667F-1*
CORR. COEF. =
ORIFNIATION =
               83.235
XALAM
                53.099
MINAX
                40.045
           =
SELTP
                 . 246
```

```
*************************
             ** 17761 POINTS FROM 77- V -18 TC 77-VIII-18
** 6217845C
INST. DT-5108 DEPTH 5438 M. UNITS = MM/S , DEGREES CELSIUS
VARIABLE ---- EAST ---- NORTH ---- SPEED --- TEMPERATURE
MEAN
         =
              42.116
                           3.290
                                       71.810
STO. FRA.
         =
                .390
                            · 30 I
                                        .229
                                                     .114 - 3
VARIANCE =
            2698.332
                        1608.297
                                      934.595
                                                     . 2321 - 3
                                       2.350
KURTOSIS =
                           2.159
               2.415
                                                    3.945
SKEWNESS =
                                        .253
               -.282
                           -.124
                                                    1.177
MINIMUM
            -102.166
                         -93.826
                                       20.000
                                                    2.135
MAXIMUM
         =
             165.319
                         104.946
                                      176.400
                                                    2.179
----EAST & NORTH-----
                        * * * * * *
                                     * * * *
COVARIANCE =
               189.519
CORR. COEF. =
                  .910E-1*
ORIENTATION =
                80.413
MAJAX
           =
                52.253
MINAX
           Ŧ
                34.702
FLLIP
           =
                  . 240
```

```
**********************
** 6221A450
               ** 17733 POINTS FROM 77- V -18 TC 77-VIII-18
TNST. V-0183 DEPTH 5418 M. UNITS = MM/S . DEGREES CALSIUS
VARIABLE ---- EAST ----- NORTH ---- SPEED ---- TEMPERATURE
MEAN
              43.526
                           -6.136
                                       76.560
                                                     2.135
STO.ERP.
                            . 328
                                         .243
         =
                .415
                                                      • 179: - 3
VARIANCE
         =
            3057.363
                         1911.701
                                     1049.254
                                                      . 5661 - 3
KURTOSIS
               2.526
                           1.958
                                        2.458
                                                    40.479
SKEWNESS
               -.332
                           -.135
                                         .179
                                                     2.845
MUMINIM
            -117.727
                         -115.311
                                       20.000
                                                     2.093
MAXIMUM
         =
             166.817
                          98.321
                                      176.522
                                                     2.669
-----EAST & NORTH-----
COVARIANCE =
               232.487
COPR. COFF. =
                 .962<sup>-1</sup>*
ORIENTATION =
                73.953
XALAM
                55.732
MINAX
                43.203
TLITP
                 .224
```

Table 3

Offsets applied to VACM temperatures m°C

Instrument	Start	End
6217	4	-1.2
6216	6.7	-1.7
6215	reference	instrument
6214	13.8	13.8
6213	9.6	5.6
6212	11.5	7.5
6211	23.2	19.2
6221	+11.8	11.8

.5338°C subtracted to form potential temperature compatible with CTD.

Table 4

Vane Stickiness

10 day period ending 1200			Re	elative St	tickiness		
	6211	6212	6213	6214	6215	6216	6217
5/28	27	.06	.11	.13	.00	.03	07
6/7	22	.16	.03	02	.03	.00	.01
6/17	13	.15	.14	.06	.01	08	16
6/27	02	.06	.31	.03	.11	21	27
7/7	09	02	.60	07	02	15	26
7/17	19	06	.54	.02	03	07	22
7/27	<b></b> 35	07	.64	03	03	01	.14
8/6	37	.18	.68	03	11	09	26
8/16	26	.01	.53	.21	19	11	19

Average Stickiness  $\overline{(S)} \stackrel{\circ}{\sim} 900$ 


Table 5

(Inst	trument	I.D.,	Compass)	Devia	tion c	of comp	ass	from	mean (bit	s)
Data	name		Date	0	1	2	3	4	5	
6211	(0325,	271)	12/10/76	4	1	0	0	0	0	
6212	(5104,	136)	1/26/77	6	0	0	0	0	0	
			1/30/78	5	0	0	0	0	0	
6213	(5117,	147)	1/ 5/77	3	2	0	0	0	0	
			2/27/78	3	2	0	0	0	0	
			1/ 8/79	3	2	0	0	0	0	
6214	(5116,	59)	5/14/76	2	0	0	0	1	1	
			3/ 8/78	3	1	1	0	0	0	
			1/8/79	3	2	1	0	0	0	
6215	(5114,	135)	4/ 5/78	2	2	1				
6216	(5109,	139)	1/17/77	6	0	0	0	0	0	
			3/10/78	5	0	0	0	0	0	
6217	(5108,	244)	1/19/77	4	1	0	0	0	0	
			3/ 1/78	3	2	О	0	0	0	

#### Figure Captions

- Figure 1 Profiles of potential temperature, salinity and nephels (turbidity) from the first downtrace of OCEANUS 31, station 38.
- Figure 2 Diagram of Moorings 621 and 622.
- Figure 3 Time series of filtered current vectors.
- Figure 4 Horizontal kinetic energy spectra and temperature spectra from the seven instruments on Mooring A.
- Figure 5 Progressive vector diagram for filtered daily averaged current data.
- Figure 6 Composite plots of velocity and potential temperature data from Mooring A.
- Figure 7 Composite plots of velocity and temperature data from Mooring B.
- Figure 8 1-day differential velocity. Each arrow is the vector difference between the 1 day mean velocity for a given instrument and the average of this velocity over all instruments for the same time period. Each arrow is rotated so that this vertical average velocity points horizontally and to the right. The height of each arrow indicates the height of the instrument off the bottom (left hand axis). Its position on the bottom axis indicates the central time of the 1 day average. A synthetic instrument has been inserted at 75 m by linear interpolation.
- Figure 9 Compass records from top 4 instruments showing rapid mooring motion on July 19 and 20.
- Figure 10 Vane records for all instruments at a) beginning and b) end of experiment.
- Figure 11 Bearing minus direction records for all instruments for 3 periods. (Upper panels) and speed from 6211 during same periods. Bearing minus direction is a sensitive indicator of directional noise. Notice higher variance when speed is low a) and c); when speed exceeds a threshold b), and in 6213 in c).

Figure 1

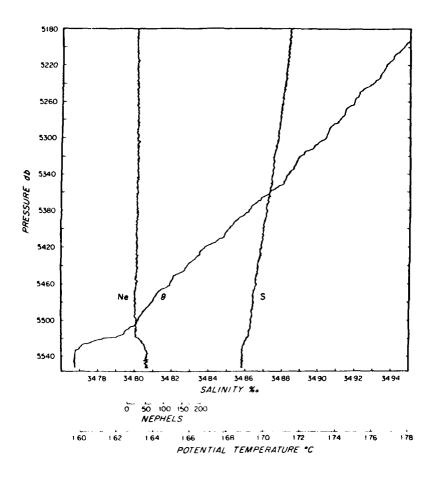

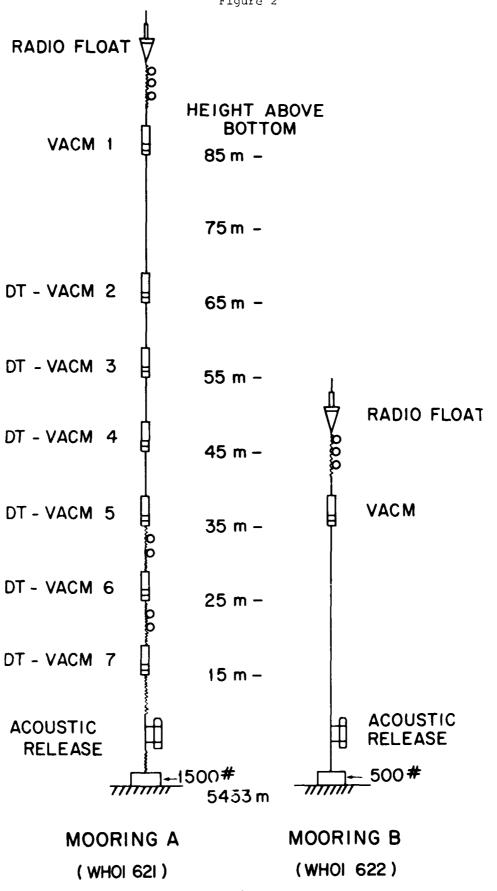
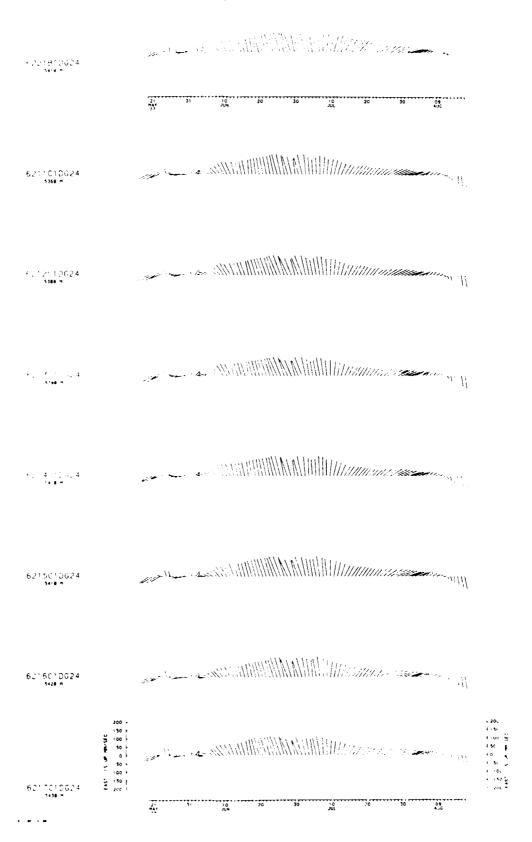
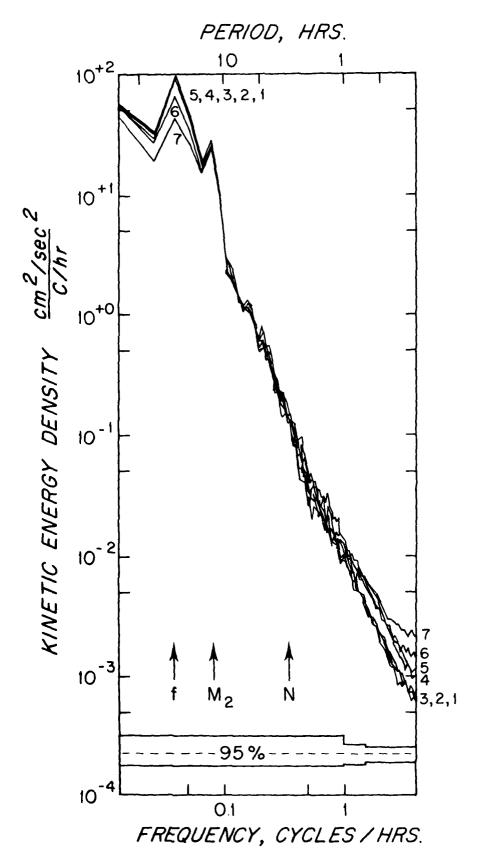


Figure 3





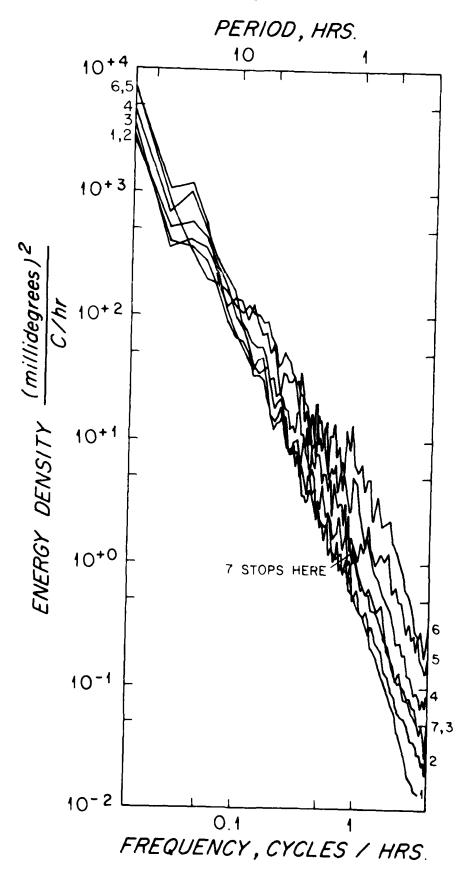
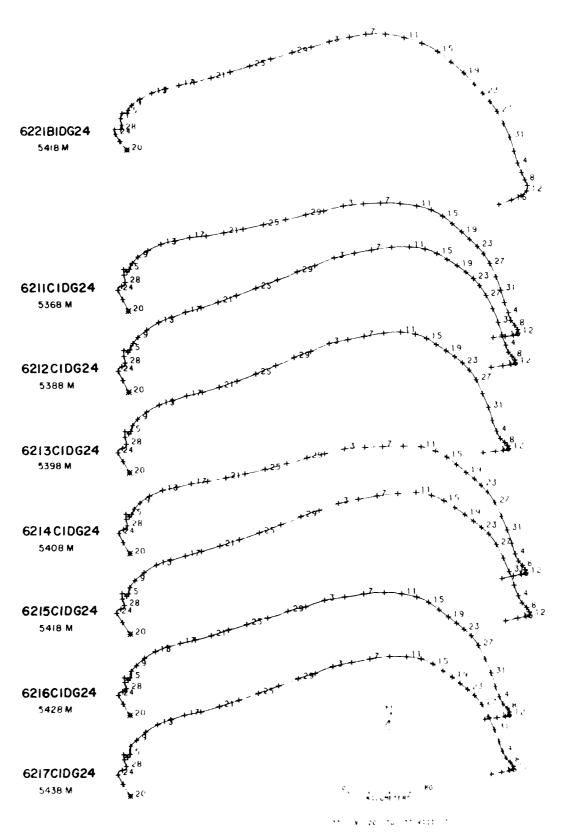
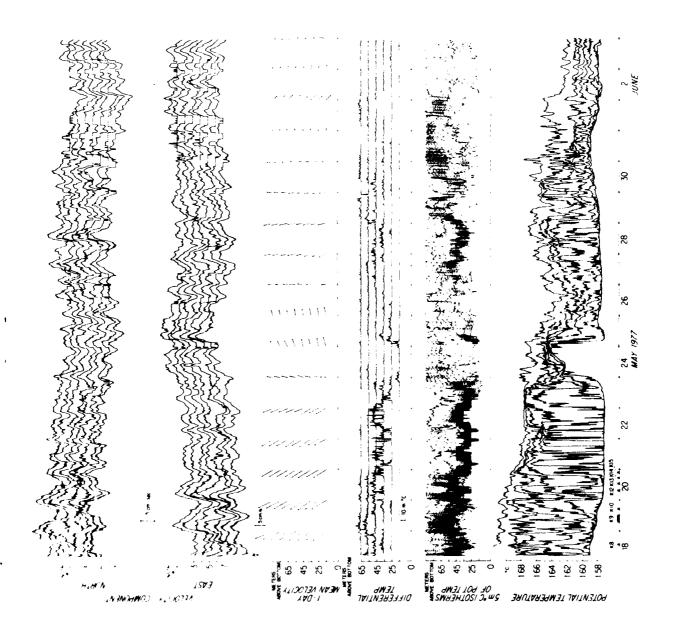
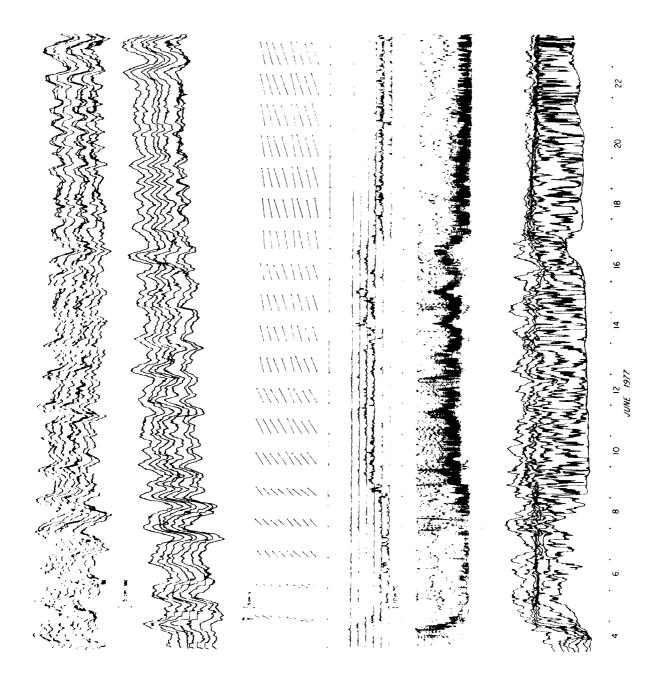
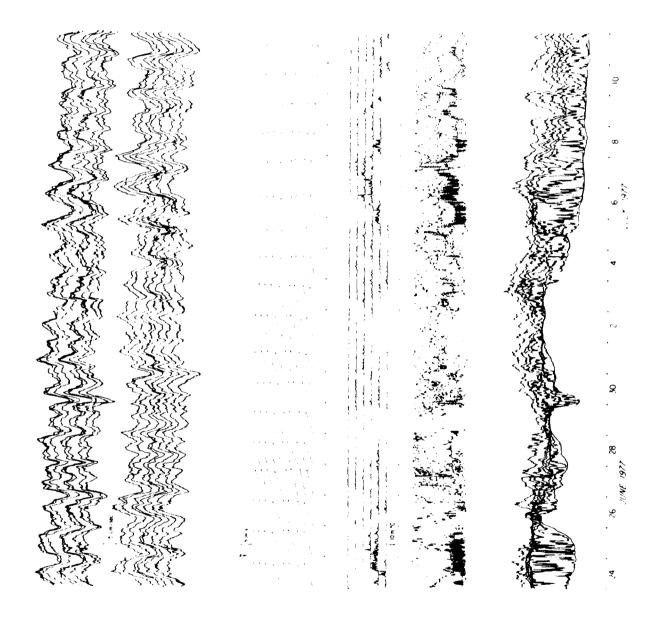



Figure 5













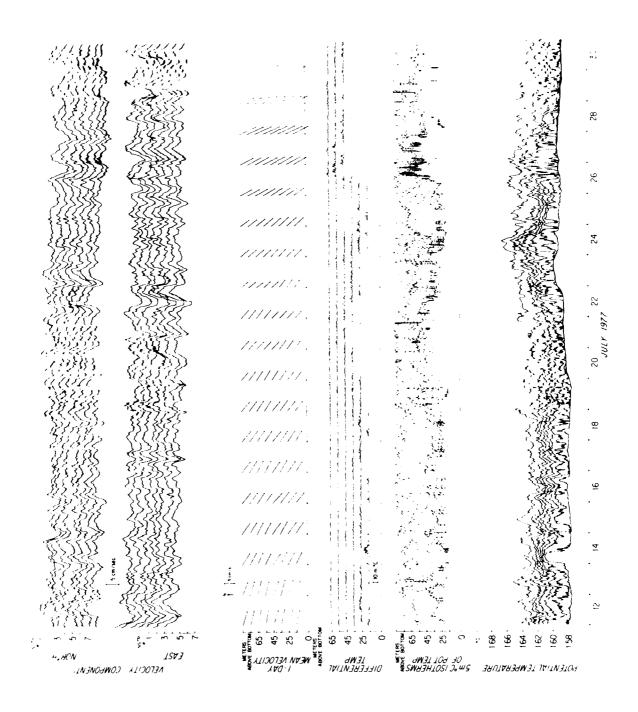


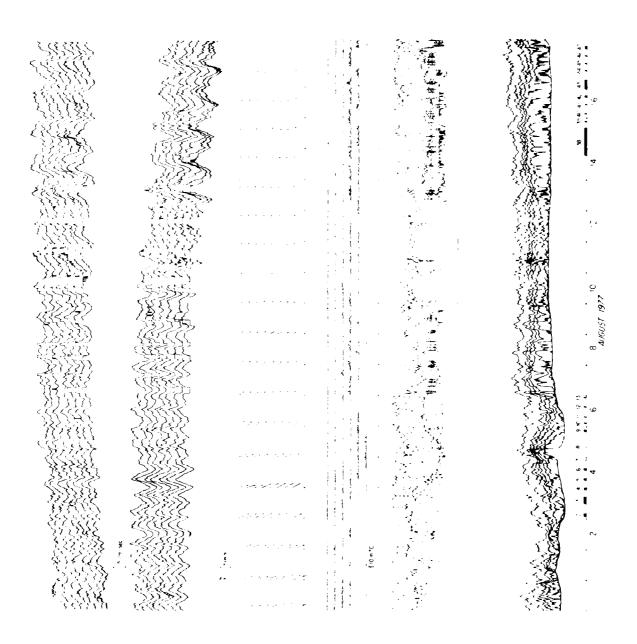

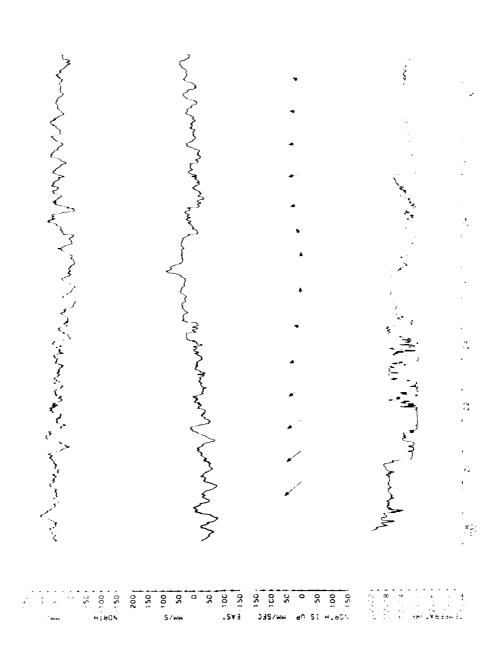

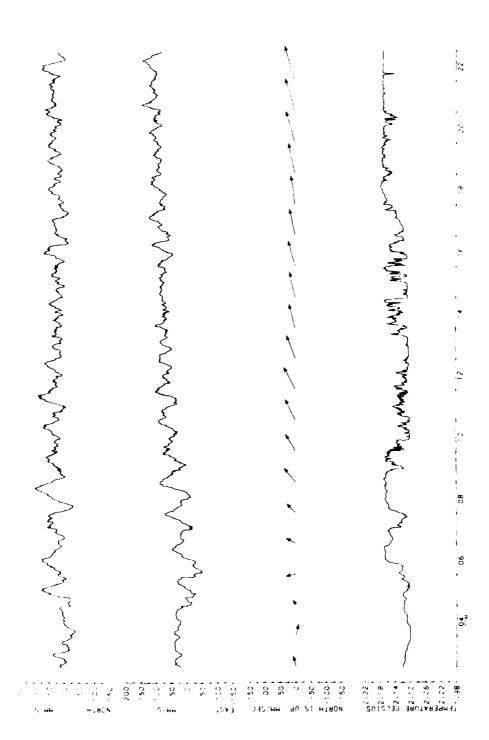

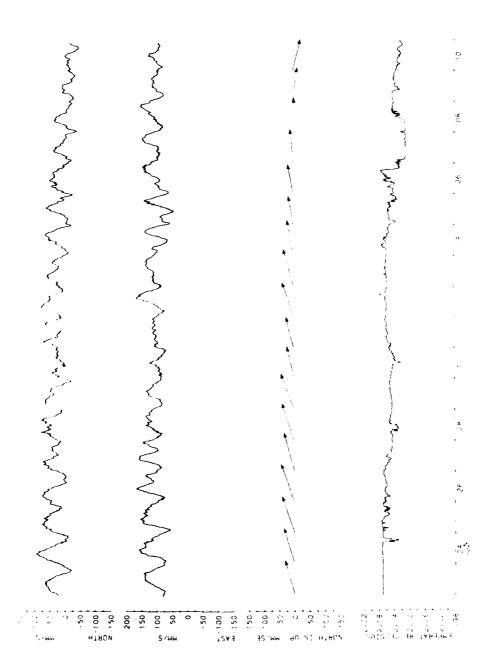

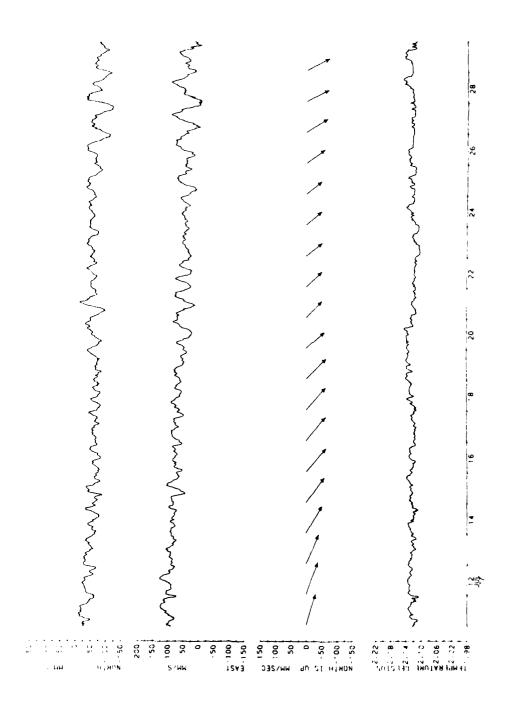




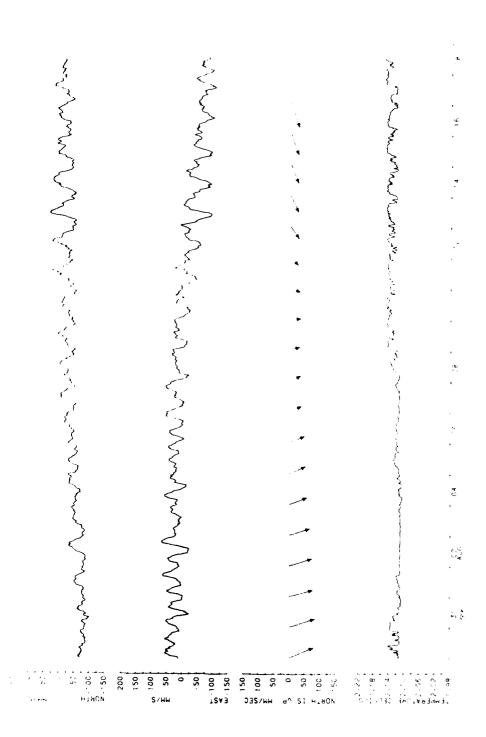



Figure 8

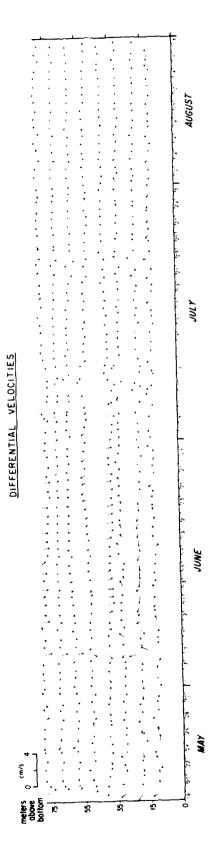


4. A secretary section of

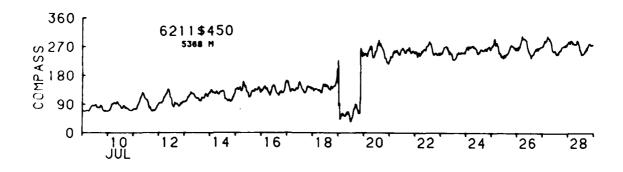

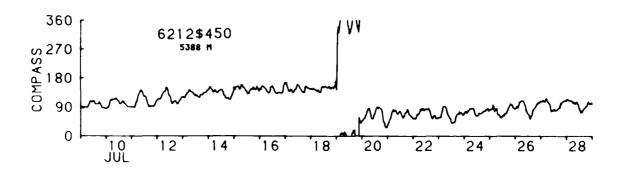

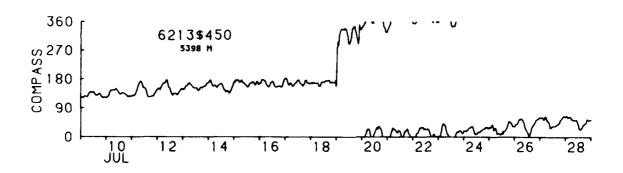


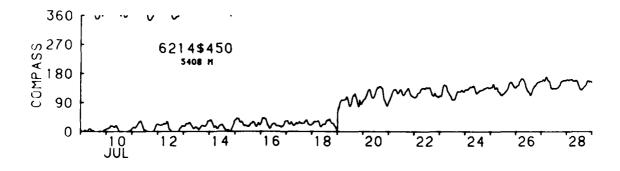


1977

1 3702 770

Figure 10

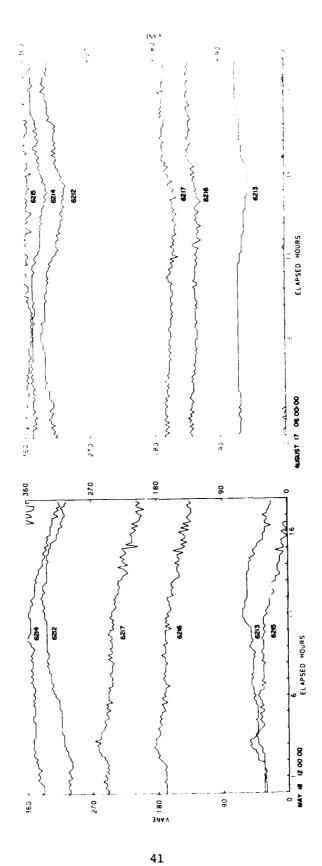

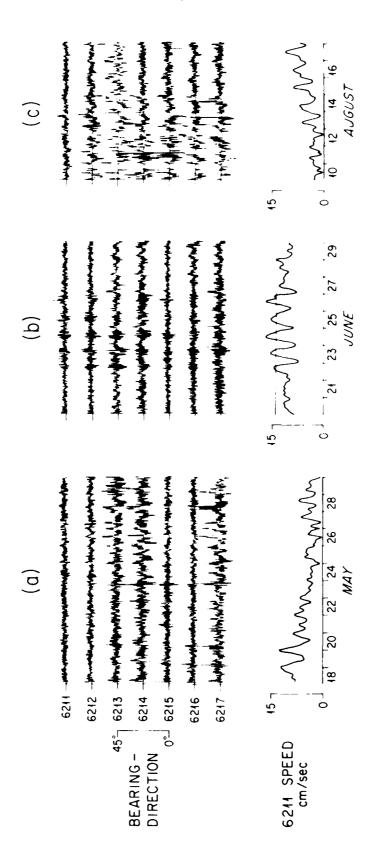

## Office Memorandum . Woods hole oceanographic institution

TO :Larry Armi, Dick Payne

DATE: April 7, 1978

FROM Jerry Dean

SUBJECT: VACM Rotor Low Speed Calibrations, Station 621 BBL DT-VACMs

Rotor calibrations at speeds between 0 and 10 cm/sec have been done and the instruments returned to the CM shop for JASIN prep.

We ran two calibrations for each instrument, one with a cage gap between posts leading into the flow, and one with a cage post leading into the flow. Each curve shown in the figures and tabulated is a linear regression fit to at least 7 points, and each point is the average of at least 5 readings at each speed. The attached figures show the spread of data. Typically, the post leading data lies on the high side of the mean at threshold and the gap leading the low side of the mean threshold.

The mean threshold is 0.7 cm/sec lower than the expression we now use in data reduction with the exception of DT-5114 which falls on our presently used calibration.

At 10 cm/sec the mean of these calibrations falls on our present curve at 1.77 rotor counts/sec. Therefore, I would recommend for your special calibrations you use

Intercept b = 1.30 cm/sec

Slope a = 39.44 cm/rev

for all data below 1.77 counts/sec except for DT-5114, for which you should use the present Buoy Group calibration.

DT-VACM	Intercept b(c/s)	Slope a(cm/rev)	Counts/sec @ 10 c/s	Correlation
5104, post	1.34	37.53	1.85	.991
5104, gap	1.16	39.63	1.83	.998
5108, post	1.53	39.31	1.72	.999
5108, gap	1.31	40.6	1.71	.999
5109, post	1.44	39.48	1.74	.993
5109, gap	1.14	41.14	1.72	.999
J114, post	2.23	35.76	1.74	.992
5114, gap	1.84	39.12	1.66	.997
5116, post	1.45	38.56	1.77	.994
5116, gap	1.17	38.80	1.82	.999
5117, post	1.36	39.39	1.76	.995
5117, gap	1.35	37.58	1.84	.997
Mean				
(except 5114)	1.30	39.44	1.77	
Standard dev(s)	0.15	1.23		

## MANDATORY DISTRIBUTION LIST

## FOR UNCLASSIFIED TECHNICAL REPORTS, REPRINTS, AND FINAL REPORTS PUBLISHED BY OCEANOGRAPHIC CONTRACTORS OF THE OCEAN SCIENCE AND TECHNOLOGY DIVISION OF THE OFFICE OF NAVAL RESEARCH

## (REVISED NOVEMBER 1978)

Deputy Under Secretary of Defense (Research and Advanced Technology) Military Assistant for Environmental Science Room 3D129 Washington, D.C. 20301

Office of Naval Research 800 North Quincy Street Arlington, VA 22217

- 3 ATTN: Code 483 1 ATTN: Code 460
- 2 ATTN: 102B
- 1 CDR J. C. Harlett, (USN)
  ONR Representative
  Woods Hole Oceanographic Inst.
  Woods Hole, MA 02543

Commanding Officer
Naval Research Laboratory
Washington, D.C. 20375
ATTN: Library, Code 2627

12 Defense Documentation Center Cameron Station Alexandria, VA 22314 ATTN: DCA

Commander
Naval Oceanographic Office
NSTL Station
Bay St. Louis, MS 39522
ATTN: Code 8100

1 ATTN: Code 8100 1 ATTN: Code 6000 1 ATTN: Code 3300

NODC/NOAA Code D781 Wisconsin Avenue, N.W. Washington, D.C. 20235

Secretary and the property of the control of the co	wacss no'e Greangraphic Institution who!-81-12	1. Colon currents 2. Ocean temperature	Nones we'le Oceanographic Institution WHO1-81-12	1. Ocean currents 2. Ocean temperature
The mean botton density and wellocity fields above three surrent contracts and searing army and a cheer that a current contracts and searing direction.  If contracts are displaced the surrent contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and searing direction.  If contracts are displaced to the surrent contracts and surrent contrac	The EDN"-IC ECONCART LATER EXPERIMENT ON THE PATTERS, REVISE, PLAIN: CORRINT AND EIGHERATURE ESSENTING TO SENTENCE. E. O'NSARO, and CL. Ammi. Develor. E. O'NSARO, and CL. Ammi. Develor. Ectors 1981. Personed for the National Source Endiasion under Grant OCE 16-81190 and for Source Endiasion under Grant OCE 16-81190 and for Source O'Nstree o' Nava's Revearch under Contract NO0014-76-C-0197; NA 083-400.		THE BENTHIC BOWNDARY LAVER EXPERIMENT ON THE PATTERS, ABVISAL PLAIN: CURRENT AND TEMPERATURE OF STATIONS DAY SERVICE. E. D'Assor, and L. Armi. Affagors. Estruary 1981. Prepared for the National Science Foundation under Grant OCE 76-89199 and for the Office of havel Research under Contract NOODIA.  76-C-01997, NR 093-600.	
1. Color currents 2. Clean pervisions 3. Entité Eculairy Layer 3. Entité Eculairy Layer 4. Color currents 5. Entité Eculairy Layer 6. Color currents 7. Colo	The mean bottom density and welocity fields above the "let desired above by Jein were observed with a current terdesire measuring array and a tomed-yo-yoing properties "is recurred descrives "he array data and includes the "is recurred descrives "he array data and includes the "is recurred descrives "he array data and includes the "is recurred to "is a compass of the "is of error mere" ("ago ed from vare and compass performance and bearing direction.	"mis card is UNCLASSIFIED	The near button density and velocity fields above the Hatterss abyssal plan were observed with a current improvement active measuring array and a towed-op-opining proceedings the array data and includes details of calibration and data quality. Sources of a metro-were diagnosed from vane and compass performance and beating direction.	This card is Uncinssifico
3. Forthic Blundary Layer  1. Stemmer, A	eluss Hole Greandorathic Institution	Seren	n.ccs we've Sceanographic Institution	
The rear lotter density and velocity fields above the Matters & Stream State of the accument of the Matters & Stream State of the Accument of the Matters of the Matters of the Accument of th	THE ENVIRONMENT AND ENTERPRESSORY ON THE CARRY ON THE CARRY OF THE CARRY ON THE CAR		The SENTING ECHTARN LANE EXPERIENT ON THE FATTER, ATMITTED TO THE FRAUDE CONTROL FATTER TO THE FRAUDE CONTROL FATTER TO THE FRAUDE CONTROL FATTER TO THE SENTING THE SENTIN	Service Surday Layer Service A.  O'Ksaro, E.  Armi, L.  CCE 76-195 V70014-12-C-0197; NR
	The mode bottom density and reflectly fields above the mode attention as current from the mode attention as current from the mode attention as current from the mode attention and attention are attention and attention and attention and attention are attention and attention and attention and attention are attention and attention and attention attention and attention are attention and attention are attention	3131573 ONCI 675156	The rear futton density and velocity ffelds above the Matteras atjuda, blain were miserved with a current/itterature measuring array and a towed-poyolong pro-fire. The reserved with a fire of the current of the measuring of the current of the cur	district School Sta